
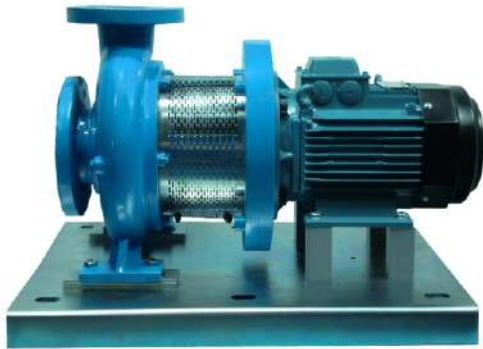


Finsbury - Close couple Pumps 250 Series - 4 Pole - 1450 RPM

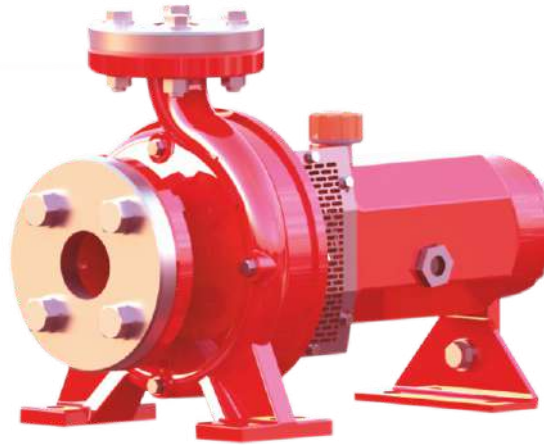

Standard

250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858





Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-65x40-250-2.20/4	222	100L	2.2Kw	1450	18.5	7.7
2	FPS-65x40-250-3.00/4	240	100L	3.0Kw	1450	23.8	8.5
3	FPS-65x40-250-4.00/4	259	160M	4.0Kw	1450	27.8	9.1
4	FPS-65x40-250-5.50/4	278	160M	5.5Kw	1450	28.5	9.3

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

65 x 40 - 250 - 4 Pole - Fixed Speed - 1450 RPM

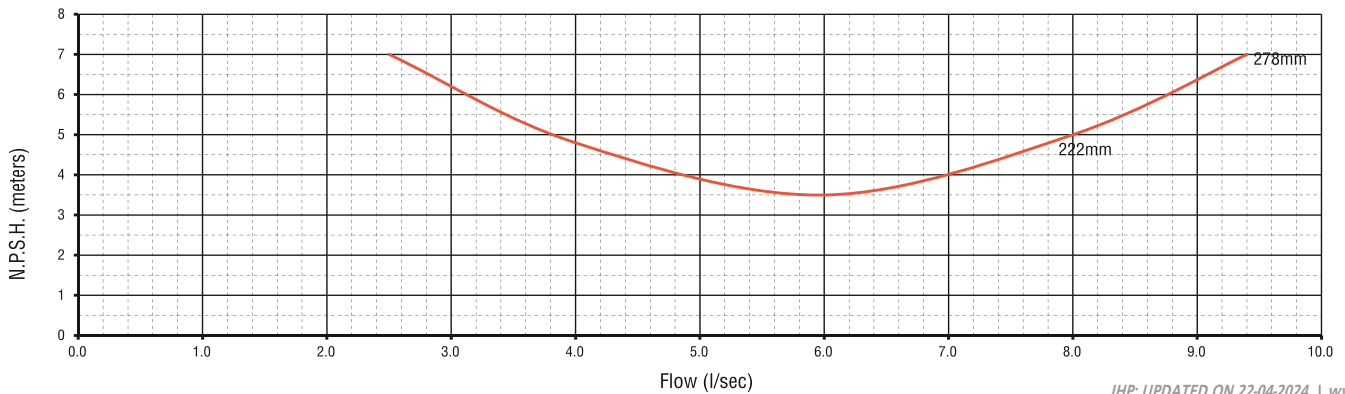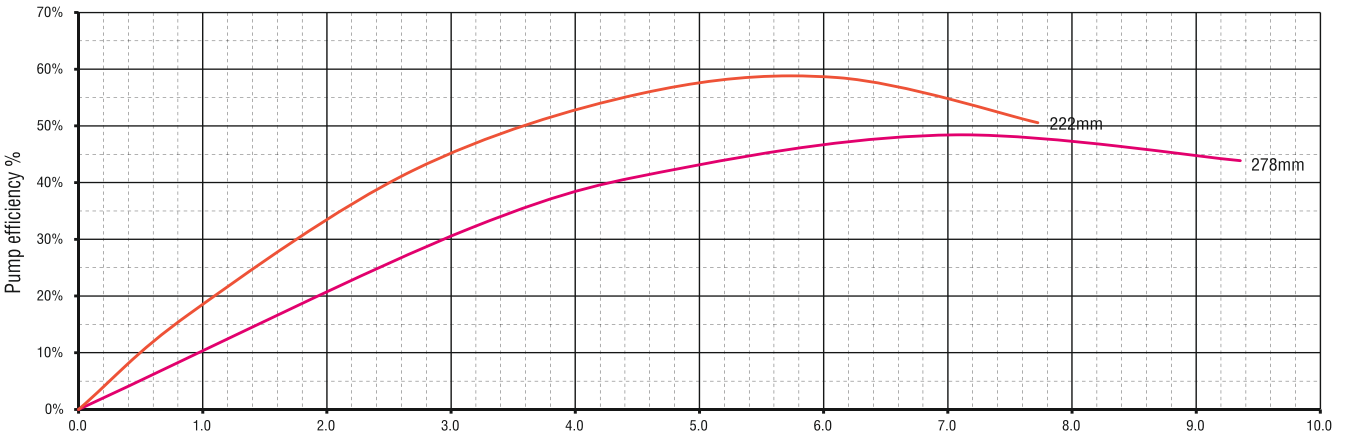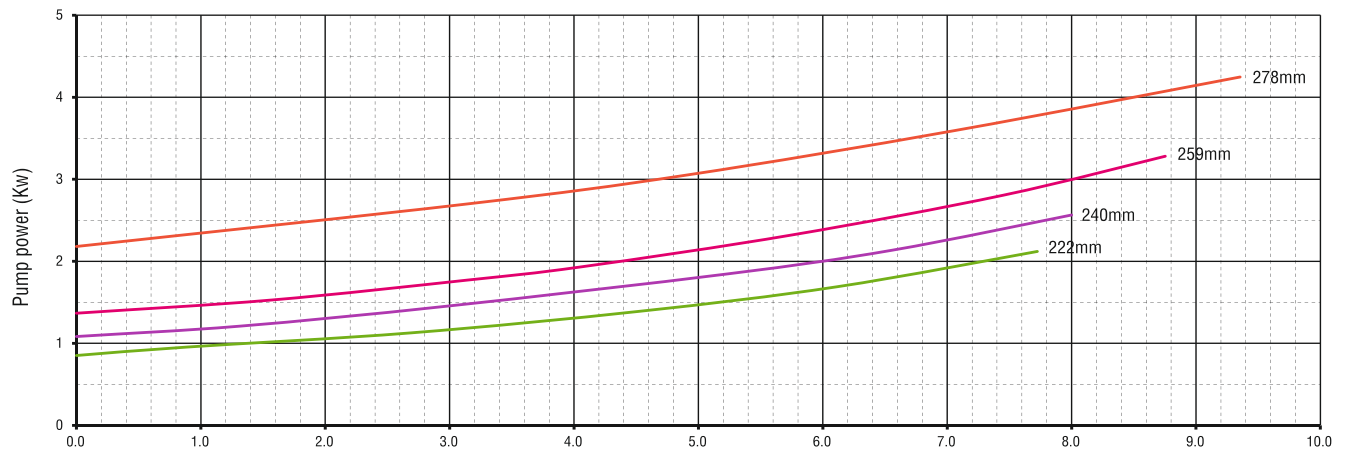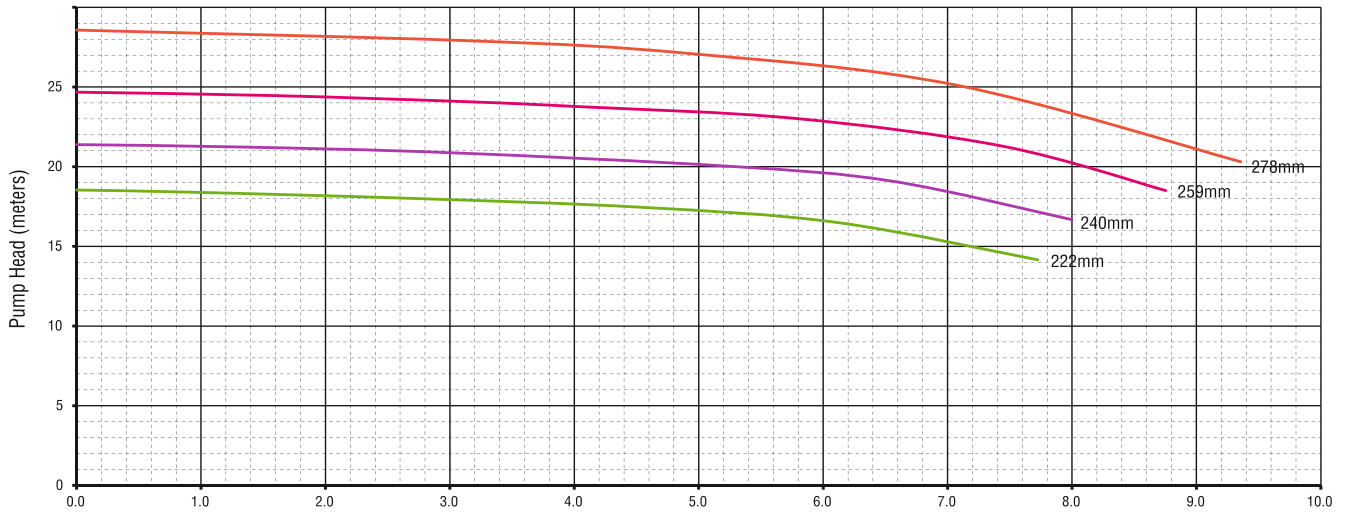

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD



No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 250 Series - 4 Pole - 1450 RPM

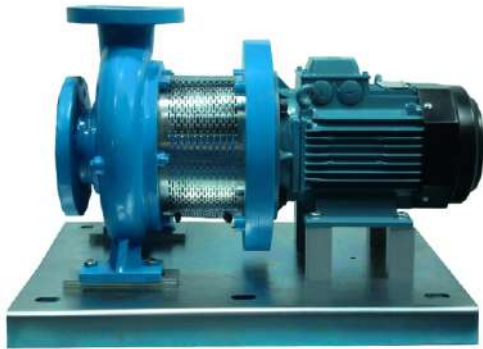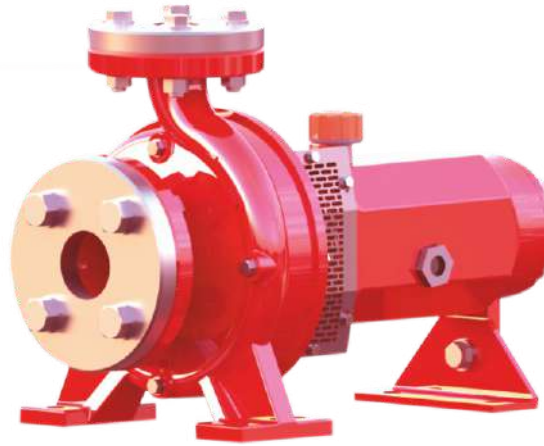

Standard

250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858





Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-80x50-250-3.00/4	222	100L	3.0Kw	1450	18.5	14.0
2	FPS-80x50-250-4.00/4	240	112M	4.0Kw	1450	21.0	15.0
3	FPS-80x50-250-5.50/4	259	132S	5.5Kw	1450	24.0	16.0
4	FPS-80x50-250-7.50/4	278	132M	7.5Kw	1450	28.5	17.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

80 x 50 - 250 - 4 Pole - Fixed Speed - 1450 RPM

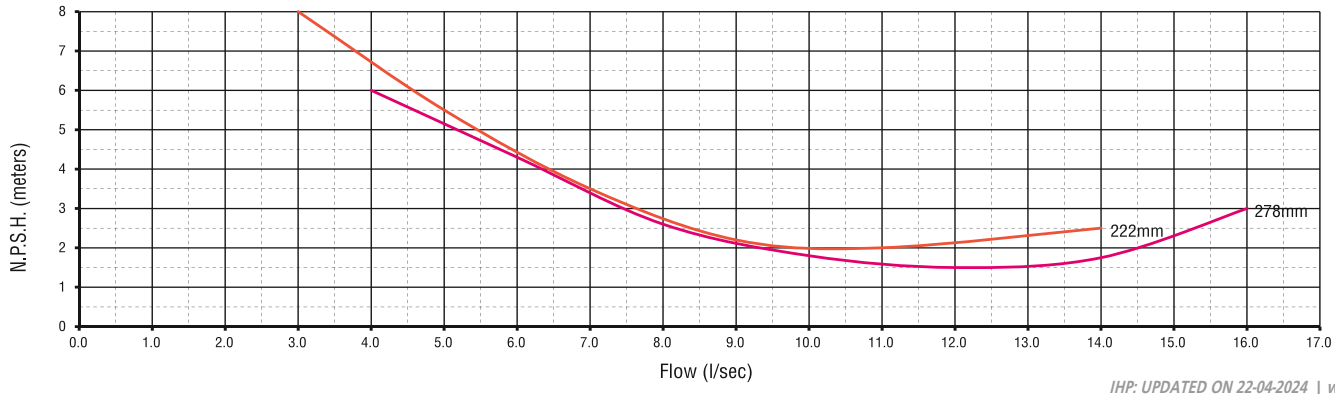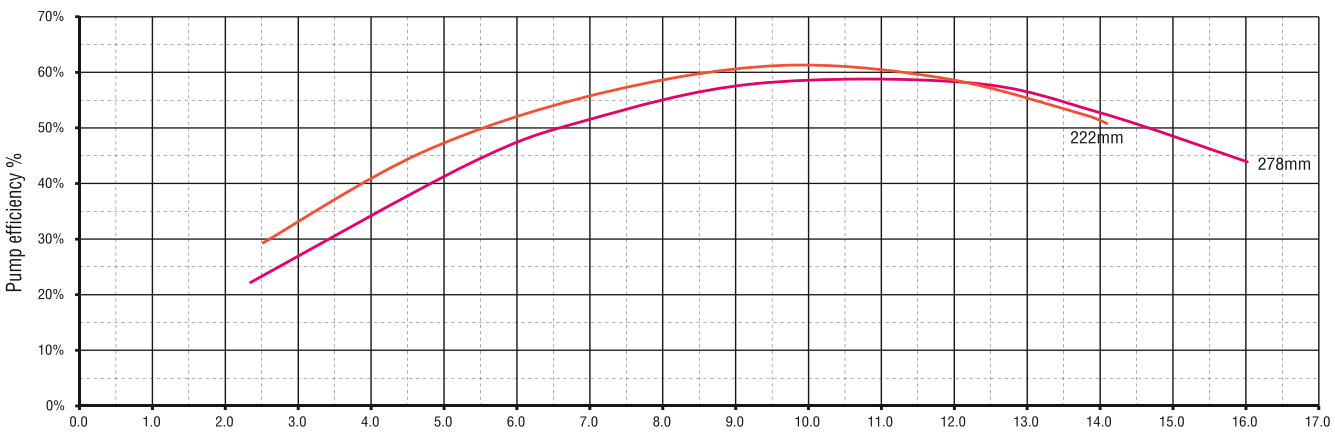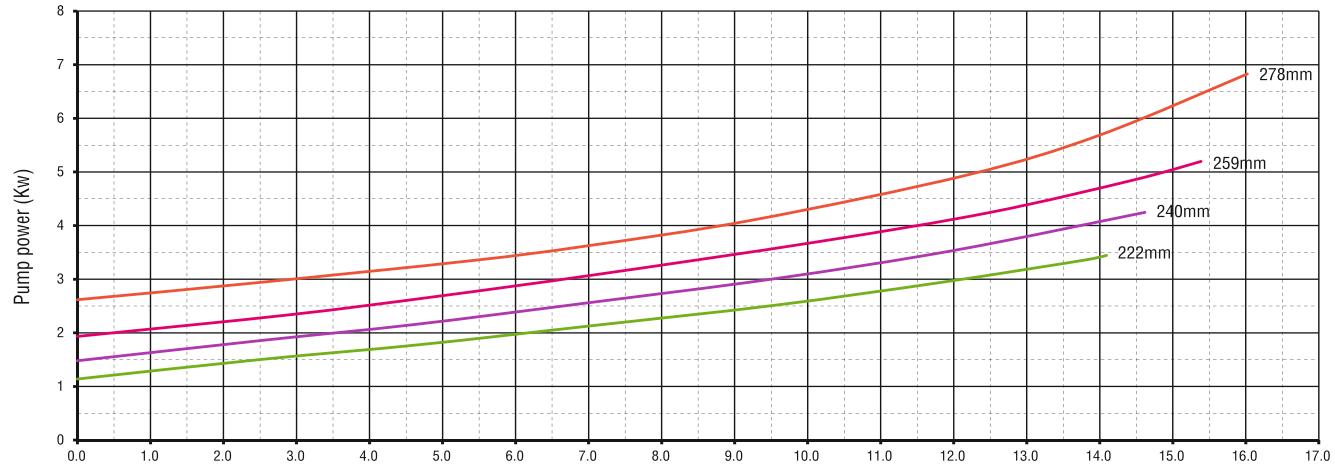
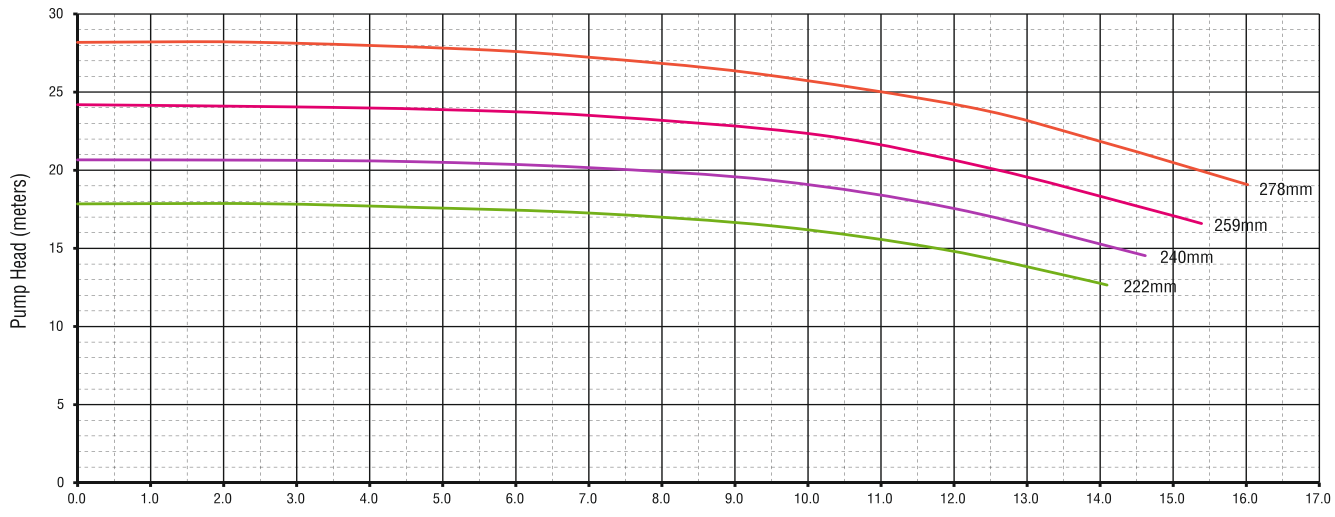


IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road
 Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA
 Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800
 Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

Finsbury - Close couple Pumps 250 Series - 4 Pole - 1450 RPM

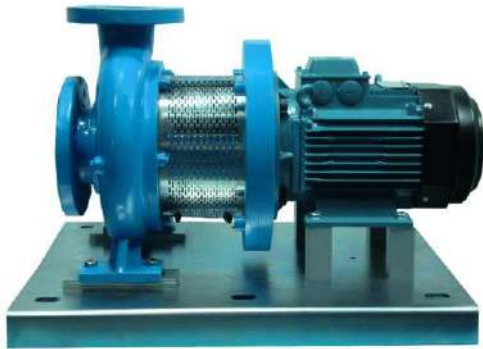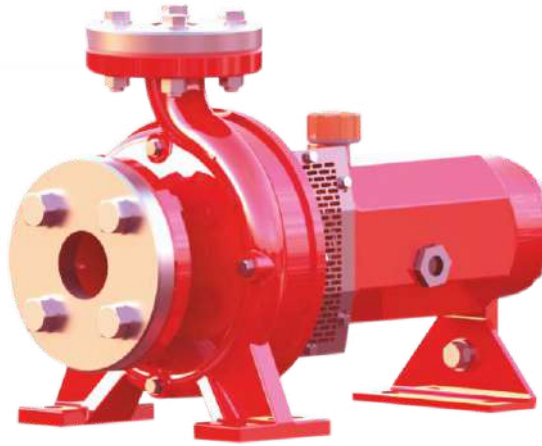

Standard

250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858





Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-100x65-250-4.00/4	222	112M	4.0Kw	1450	15.9	18.5
2	FPS-100x65-250-5.50/4	240	132S	5.5Kw	1450	18.5	21.4
3	FPS-100x65-250-7.50/4	259	132M	7.5Kw	1450	23.5	22.5
4	FPS-100x65-250-11.00/4	278	160M	11.0Kw	1450	25.6	23.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

100 x 65 - 250 - 4 Pole - Fixed Speed - 1450 RPM

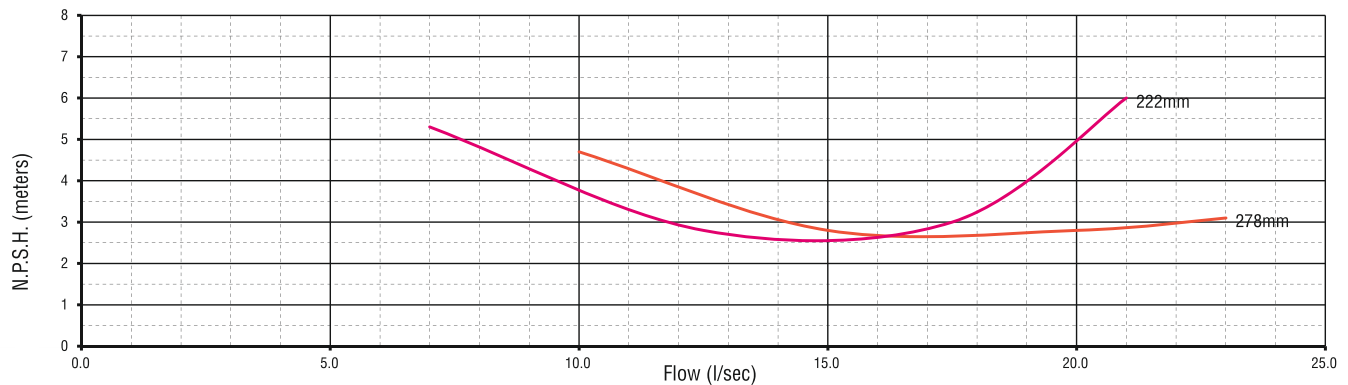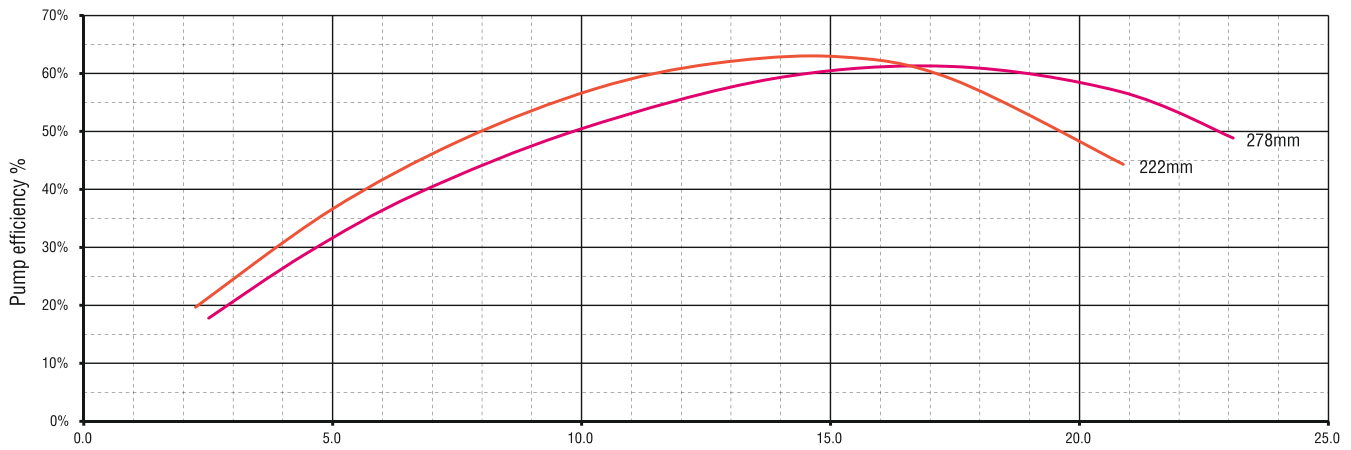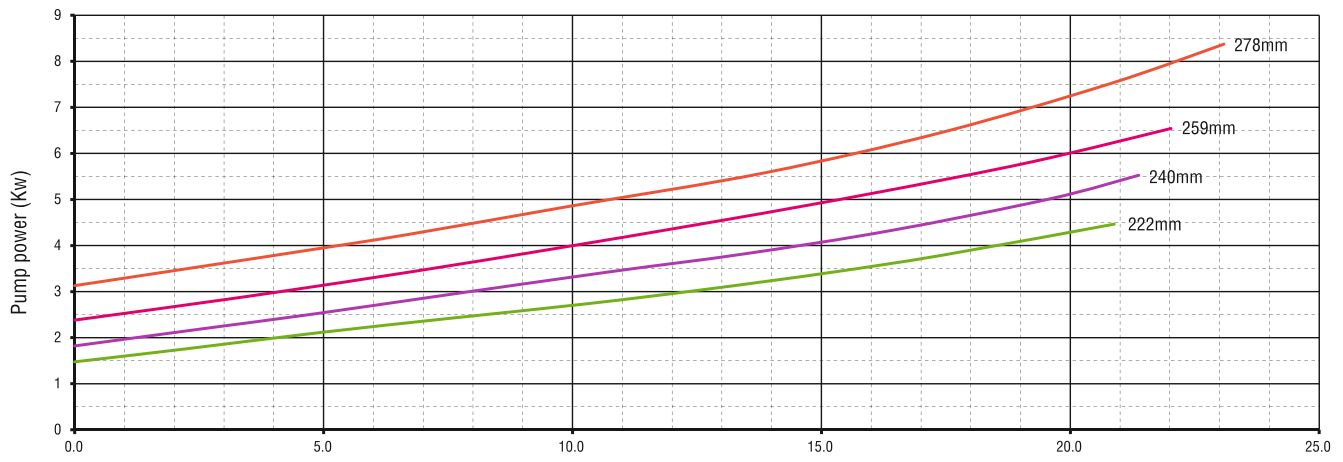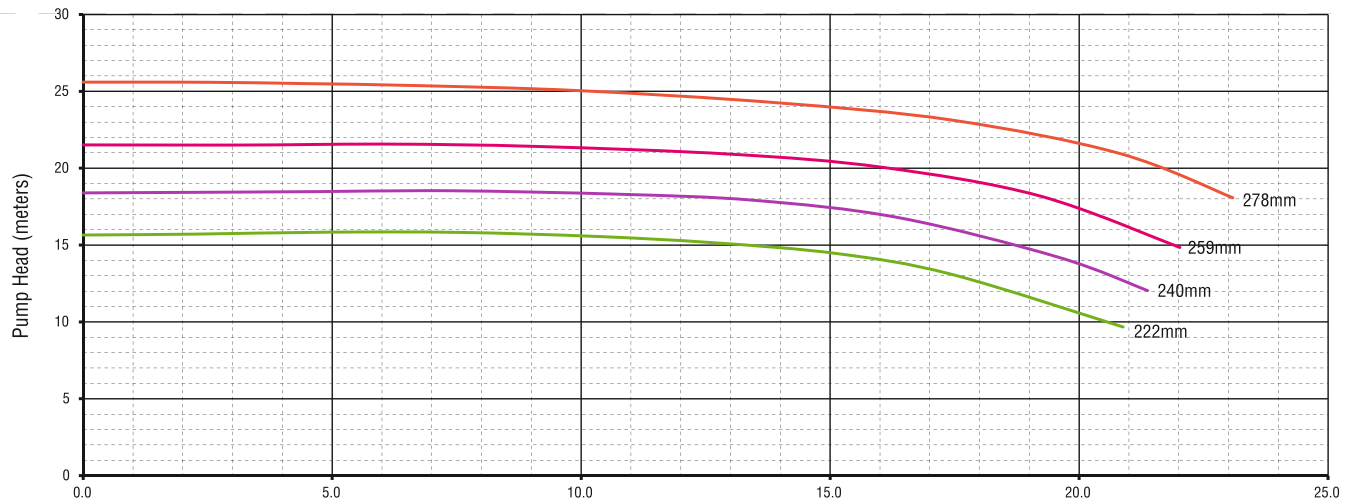

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD


No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in

) L Q V E X U \ & O R V H F R X S 6 H U L H V 3 R O H

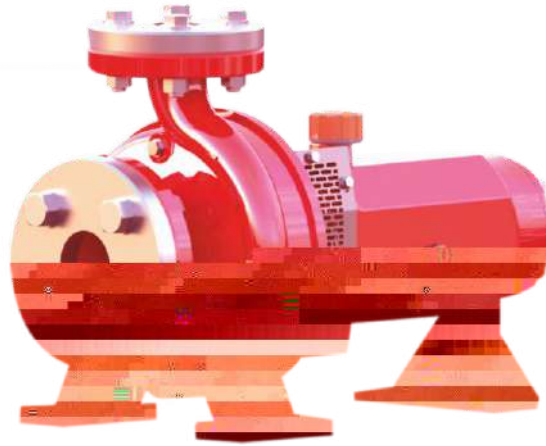

6WDQGDUG

6HULHV EHDU VKDIW VLQJOH VWDJH FHQWULIXJDO SXPSV

600RGHO	1XPSHOOH	VU'DPH	PDIH 6KDIW	ORZ 6SHH	G0530 +HDC	OWU)ORZ	/36
)36 [0	.Z				
)36 [0	.Z				
)36 [/	.Z				

<p>0D[LPXP DPELHQW^R & WHP SHUDWXUH 6WDQGDUG 02& 0D[LPXP IOXHQW^R & WHP SHUDWXUH & DVLQJ 6* 0D[LPXP FDLQJ SUHVXUH EDUPSHOOHU 66 %URQ]H)OXLG PXVW EH FOHDQ IUHH IURP DEWDYWDL SOHWL 60HHO :HDU ULQJV EURQ]H ZHDU ULQJV% FDQLQH LWOCH 6MROHG KH LPSHOOHU DQG FDLQJ</p>	<p>6WDQGDUG 02& & DVLQJ 6* EDUPSHOOHU 66 %URQ]H DEWDYWDL SOHWL 60HHO LWOCH 6MROHG KH</p>
--	--

,+3 83'S7(' 21 _ZZZ LKSLQG

***/ %3") : %30 5&\$) 16. 14 175 -5%**



1R 0* BXQG)QRBVWULDQ 6 X6BXQJH *DXW KDPN X B DDU

<HVKZDQW% S X UH ORU .DUQDW'D'NS

7HO 0RELOH

(PDLO VDOHV#LKSXPBZKSLQGLD LQSPZSZ LQ

Finsbury - Close couple Pumps 250 Series - 4 Pole - 1450 RPM

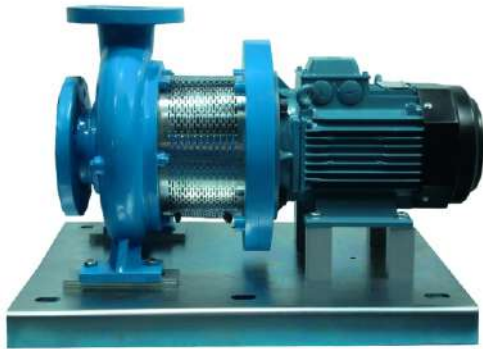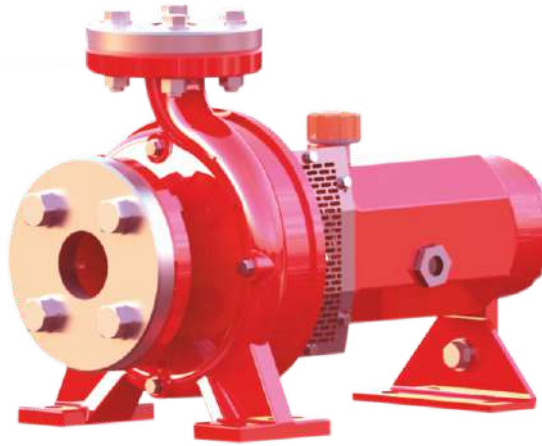

Standard

250 Series bear shaft single stage centrifugal pumps are designed manufactured to ISO Standard 2858





Sl.	Model Number	Impeller Dia mm	Frame Size	Max. Shaft Power	Max. Speed RPM	Max. Head Mtr.	Max. Flow LPS
1	FPS-150x125-250-11.0/4	222	160m	11.0Kw	1450	18.5	78.0
2	FPS-150x125-250-15.0/4	240	160L	15.0Kw	1450	23.5	88.0
3	FPS-150x125-250-18.5/4	259	180M	18.5Kw	1450	25.6	92.0
4	FPS-150x125-250-22.0/4	278	180L	22.0Kw	1450	25.6	92.0

Maximum ambient temperature +60°C
 Maximum fluent temperature +80°C
 Maximum casing pressure 16 bar
 Fluid must be clean free from abrasive particles
 Wear rings - bronze wear rings can be fitted to impeller and casing

Standard MOC
 Casing-SG 500/7
 Impeller-SS316-Bronze
 Shaft-Stainless Steel 431 with water slinger
 Bearing-Fully Sealed heavy duty roller bearing

ISO 160 - CENTRIFUGAL CLOSE COUPLE PUMPS

150 x 125 - 250 - 4 Pole - Fixed Speed - 1450 RPM

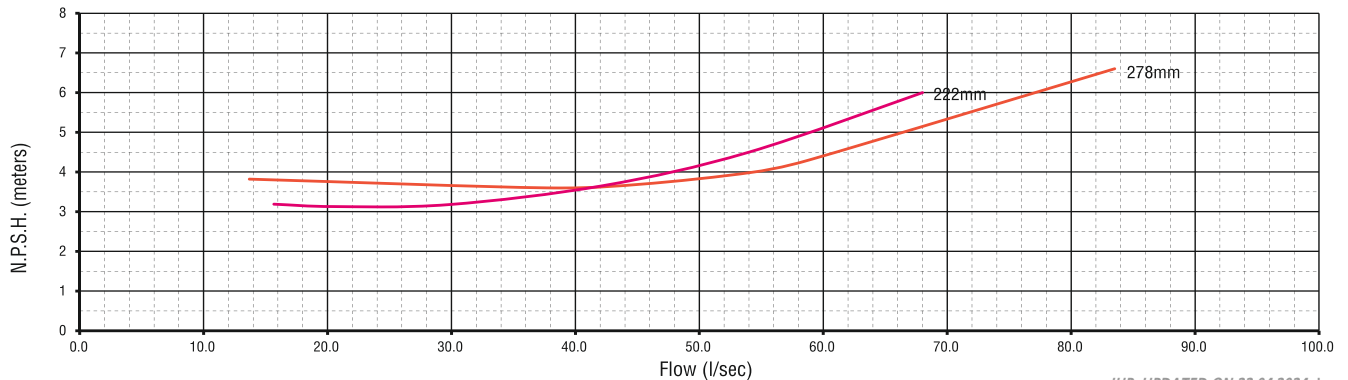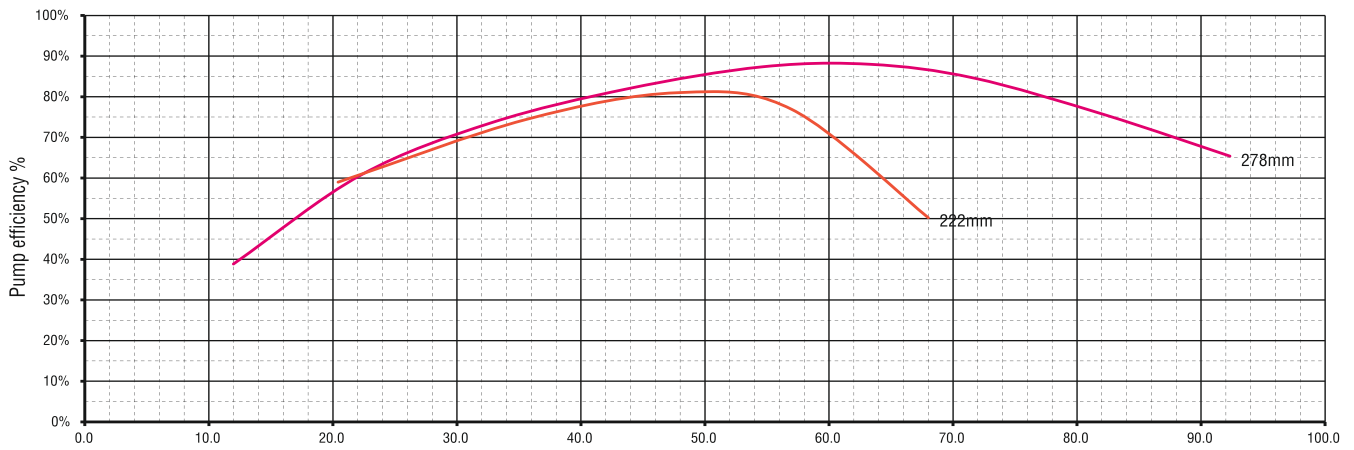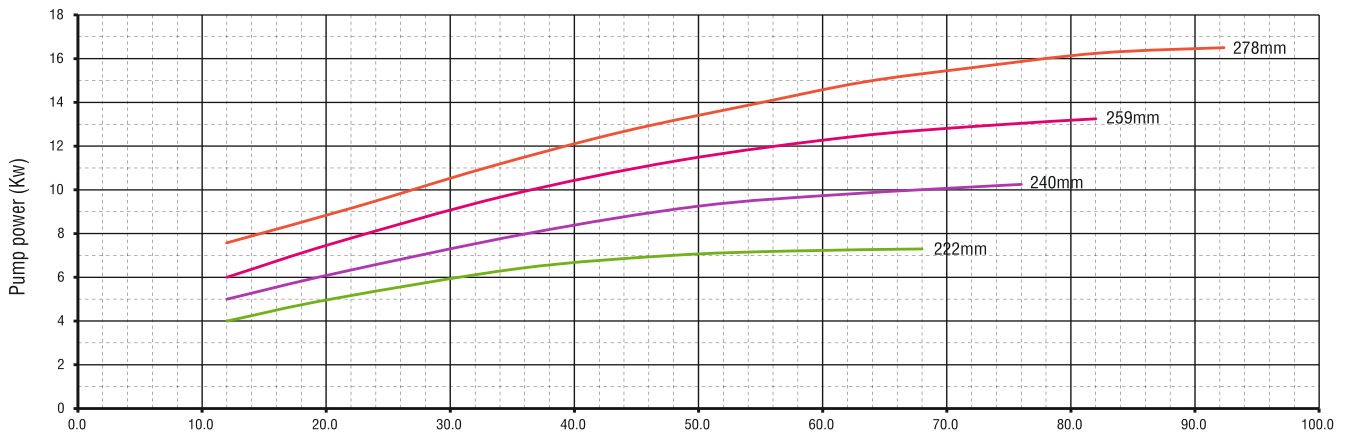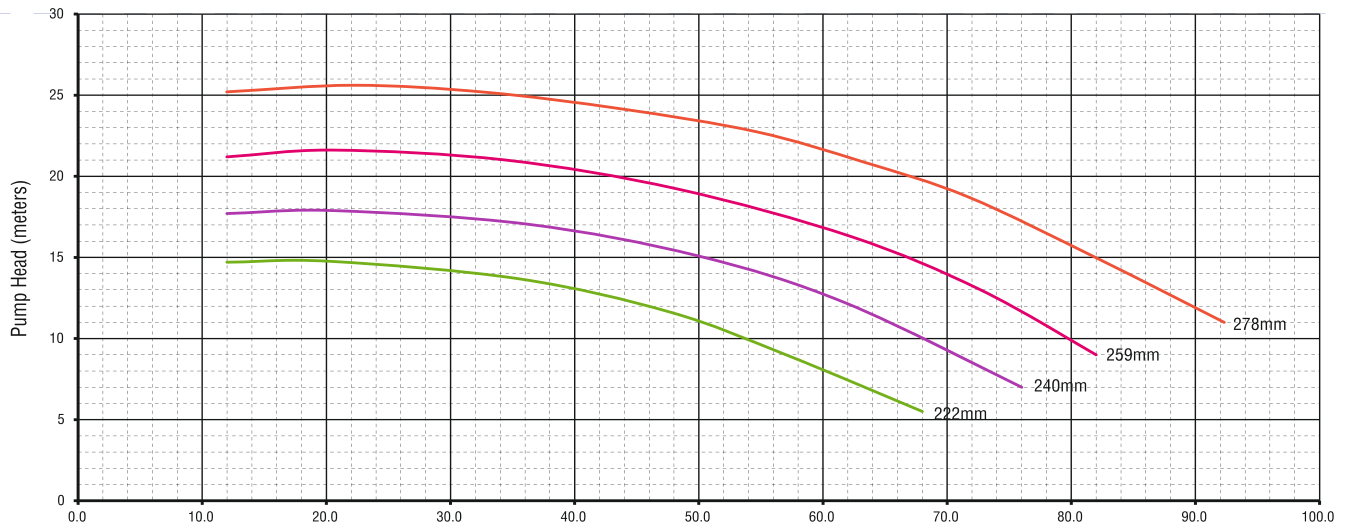

IHP: UPDATED ON 22-04-2024 | www.ihpindia.in

INDRA HYDRO TECH PUMPS PVT LTD

No.85/M, Ground Floor, Industrial Suburb, 2nd Stage Gautham Nagar, Tumkur Road

Yeshwanthpur, Bangalore 560 022, Karnataka, INDIA

Tel. : +91 80 4163 5638, Mobile: +91 94835 26899 / 80736 22800

Email : sales@ihpumps.in, Web : www.ihpindia.in | www.ihpumps.in